

FAR-5/55

Professional Line


Fully automatic punching machine

Far-5/55 has been developed for fast punching of loose sheets in large quantities with any size and type of holes required for the different binding systems: wires, spiral, plastic combs. The Far-5/55 machine has been designed and manufactured with the utmost care in order to achieve top standard reliability and a long working life.

Change over of the tools is very fast and safe.



Fully automatic punching machine



Punching tool location.



Sequence keeping device.




Picking device.



Paper feeding system.

PUNCHING PATTERN

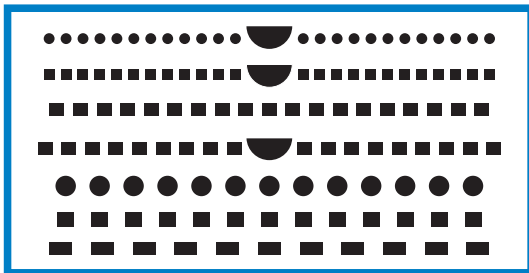

HOW IT WORKS

Far-5/55 can be fed continuously with material of variable thickness (paper and/or light cardboard). Sheets are safely picked-up by an apposite device in bunches of 1,5/2 mm. each time, centred and then punched with precision and accuracy. The sheets are solidly shift by four transport belts into the punching area where they are registered by a special device and then punched. Punched materials are preserved in numerical sequence and collected on a conveyor separately driven, in shingle style, so that the further procedure is made easier.

FEATURES

- Maximum thickness per stroke: 2,5 mm. (standard 1,5 mm.).
- Maximum punching size: 550 x 550 mm.
- Minimum punching size: 160 mm. (on punching side) x 120 mm.
- Speed: adjustable up to 120 strokes/minute.
- Punching distance from the edge: adjustable up to 40 mm. max.
- Wide range of punching tools available, including tool for plastic-coils holes.

TECHNICAL SPECIFICATIONS

⚡ 240 V single phase 50/60 Hz; 3 Kw

⚖ H 1200 x D 760 x L 3200 mm.

⚖ 1250 Kg

STANDARD PUNCHING TOOLS

- **GF-55/3G:** 3:1" pitch, three 3,7 x 4,0 mm. hole/inc., 550 mm. punching length, including thumb-cut for hanger application.
- **GF-55/3:** 3:1" pitch, three 3,7 x 4,0 mm. hole/inc., 550 mm. punching length. Suitable when using 5/16", 3/8" and 7/16" wires.
- **GF-55/2:** 2:1" pitch, two 4,7 x 5,0 mm. hole/inc., 550 mm. punching length. Suitable when using 5/8" and 3/4" wires.

Any other shape of punching bars may be supplied on request.

The Company reserves itself the right to modify the features of the products shown in this catalogue.



RILECART® S.r.l.
WIREBIND INTERNATIONAL



RILECART - WIREBIND INTERNATIONAL
Headquarters and Factory:
Via Daniele Pesenti, n°1
24022 Alzano Lombardo - Bergamo
Tel. +39 035 515.900 - Fax +39 035 515.060
E-mail: info@rilecart.com - Internet: www.rilecart.com

